


AX61232TM

2U Rackmount Chassis for Mini ITX/MicroATX/ATX Motherboard with Low Profile slot bracket

Features

- Supported Mini ITX/MicroATX/ATX Motherboard
- With one 4cm and 8cm system Fan
- Support 1U FlexATX power supply
- Internal two 3.5 HDD drive bays
- One 5.25" Drive bay

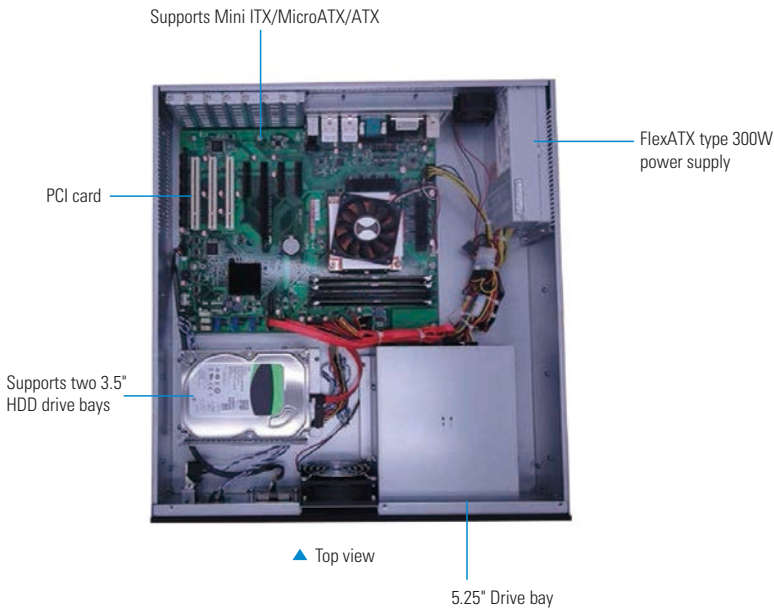

▲ Front view



▲ Rear view

Specification

Standard Color	Black
Construction	heavy-duty steel
Drive Capacity	Internal 2 x 3.5" HDD drive bay Exposed 1 x 5.25" drive bay
Cooling	1 x 4 cm & 1 x 8cm ball-bearing fan
Front Panel Indicators	1 x power on/off , 1 x HDD Front
Front Panel Controls	1 x power on/off
Front Panel Connectors	2 x USB
Rear-Punched Panel	N/A
System Board	Mini ITX/MicroATX/ATX
Expansion Interface	7 slot low profile
Operation Temperature	0°C~+40°C
Dimensions	450x427.4x88.9mm
Weight (net/gross)	10.5Kg / 12K
Operating Temperature	0°C ~ 45°C
Certificate	CE

Power Supply Specification

Items	Watt	Input	Specification Output	MTBF
FlexATX	ATX 300W (FPC)	AC 100 ~ 240V (Auto)	+3.3V@22A +5V@12A +12V1@6A +12V2@16A -12V@0.3A +5Vsb@2.5A	100,000 hours

Ordering Information

AX61232TM/X300 With ATX 300W power supply

*Specifications and certifications are based on options and may vary.

Packing List

AX61232TM chassis x 1
Screw pack x 1

Dimensions

